




Dr.-Ing. S. Haußmann
industrieelektronik
Beutwang 4 Tel. (07022) 9565-0
D-72622 Nürtingen

All about e-mobility

Universal test bench inverter UPI1000

Inverter for 3/6-phase electrical motors

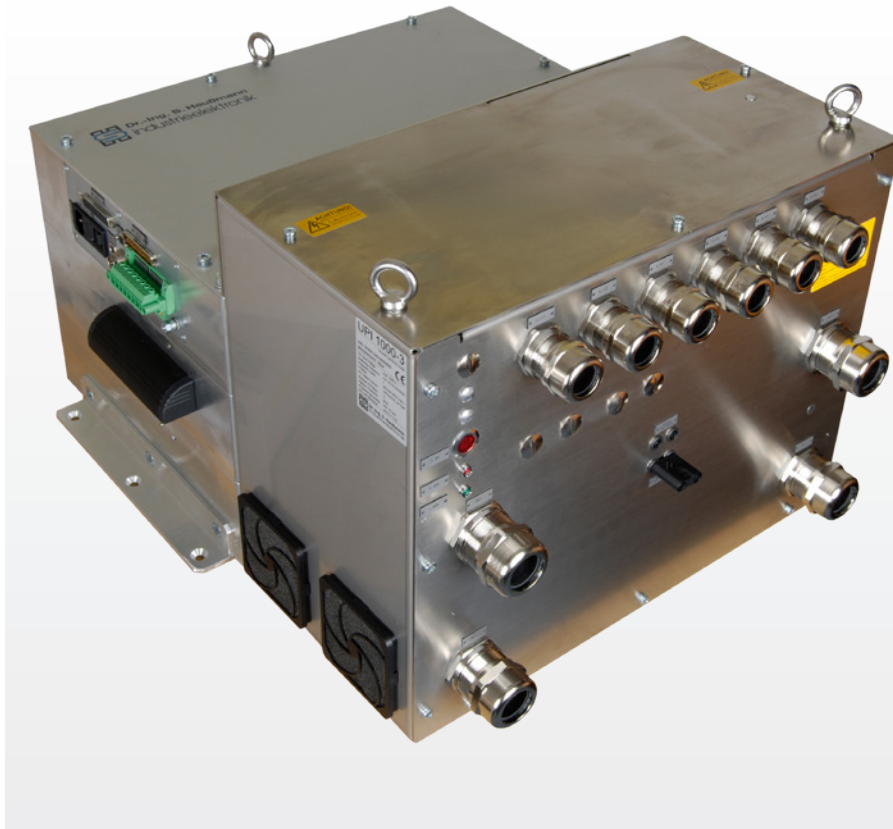

19" rack with MicroLabBox

Main features


- Power electronics with SiC modules with suitable driver control.
- Control and data acquisition via dSPACE MicroLabBox® with 50-pin DSub connectors
- AC and DC voltage acquisition ($\pm 0,6\%$, 0 – 800 kHz)
- DC and AC current acquisition ($\pm 1\%$, 0 – 72 kHz)
- Heat sink temperature sensing
- Connection possibilities for resolver and incremental encoders via interface cards
- Protection against overcurrent and overvoltage
- DC power supply via battery simulator or vehicle battery possible
- Internal FPGA logic for self-protection (max. frequency, hot branch, heat sink temperature)

Dr.-Ing. S. Haußmann Industrie Elektronik
Beutwang 4 · 72622 Nürtingen

Tel.: +49 (0)7022/9565-0 · Fax: +49 (0)7022/9565-501

info@sh-el.de · www.sh-el.de


Technical data:

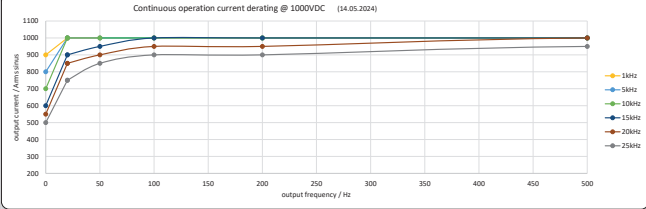Max. voltage DC:	1000 V
Continuous output AC:	1200 kVA
Continuous current AC:	1000 Arms (3-phase), 500 Arms (6-phase)
Switching frequency:	1 kHz – 25 kHz (max. 50 kHz)
Continuous current AC vs. rotating field frequency	
DC link capacity:	1,68 mF
Protection class:	1, PE connection with min. 70 mm ²
Protection:	IP30
Permitted ambient temperature:	5 – 40 °C, non condensing humidity
Auxiliary power supply:	230 V (max. 500 VA) for inverter 230 V (max. 100 VA) for MicroLabBox®

Housing dimensions and cooling water connection:

Housing, weight:	approx. 640x595x342 mm (LxWxH)
Weight:	approx. 76 kg
Cooling water:	50:50 water-glycol, max. flow temperature: 25 °C, 30 L/min
Dimensions MicroLab-Box mounting:	approx. 450x450x140 mm (LxWxH)

Schematic representation:

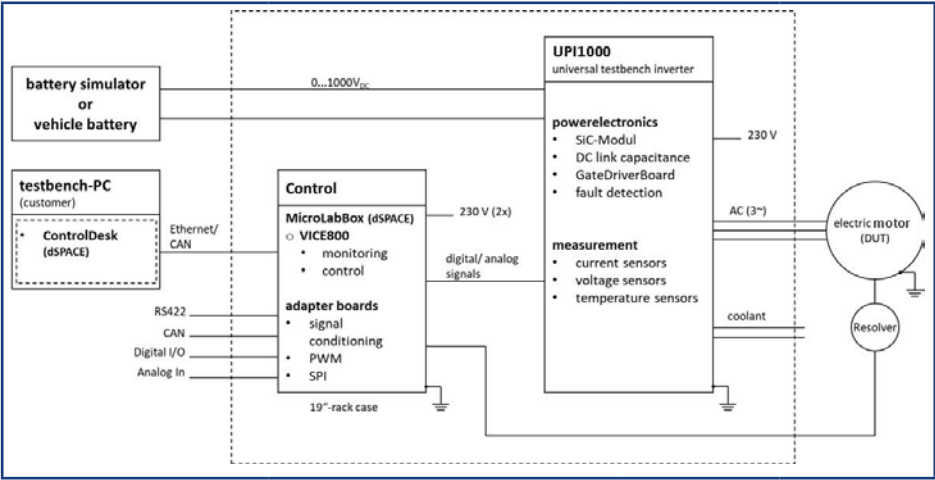

EESM extension



Main features

- Extension module to the UPI1000 for supplying externally excited machines (the module is integrated into the UPI1000 and must therefore be taken into account when ordering)
- Control and measured value acquisition via the UPI1000's control module
- Monitoring of coolant temperature, overcurrent and overvoltage
- Internal communication with the UPI1000 control board
- DC power supply directly from UPI1000 or externally via additional source possible
- Integrated buck converter to reduce the excitation voltage
- Current regulator for setting the excitation current
- Prepared for contactless and transformer-based transmission of the excitation current

Technical data:

Max. voltage DC:	1000 V
Exciting current:	-40 A ... +40 A
Continuous output AC:	max. 4 kW
Current dynamics:	depending on the regulation approx. 3 A/ms ($> 500 \text{ V}$ @ $L_{\text{exc}} = 140 \text{ mH}$ and $R = 2,9 \Omega$)
Switching frequency:	10 ... 50 kHz
Housing:	approx. 640x675x452 mm (LxWxH)
Weight:	approx. 90 kg